



HP LaserJet Enterprise flow MFP M525



Clear jams in the rear-door and the fuser area

1. Open the rear door, and push down so it is fully opened to a 90° angle.

CAUTION: The fuser can be hot while the product is in use. Wait for the fuser to cool before clearing jams.

NOTE: The rear door has two positions. It opens to a 45° angle for the rear output bin and to a 90° angle for clearing jams.




2. Remove any jammed paper.



3. Press the front-door-release button.




4. Open the front door.

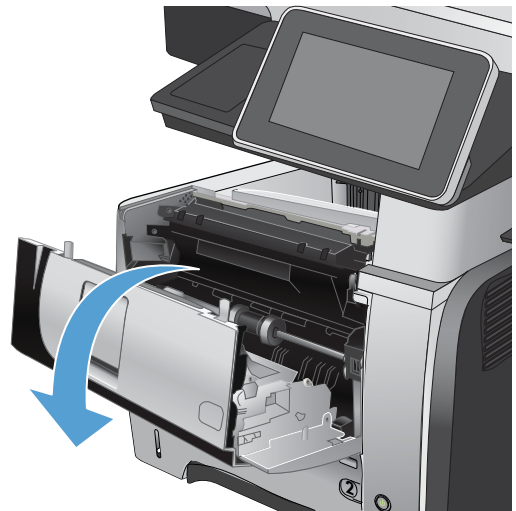


5. Remove the toner cartridge.




6. Lift the jam-access covers and remove any jammed paper.

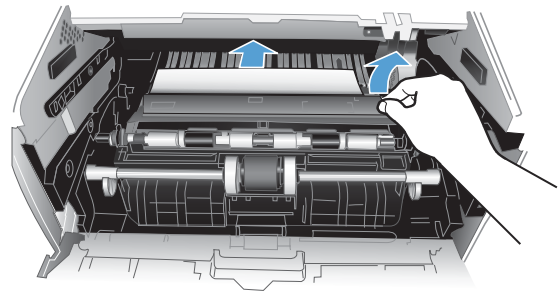

7. Reinsert the toner cartridge.

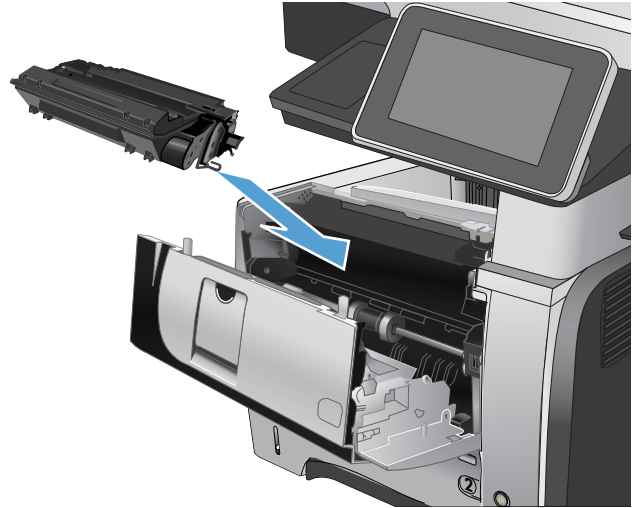

8. Close the front door.

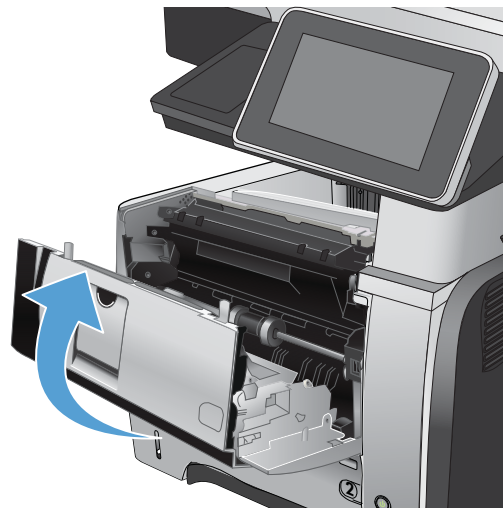

9. Close the rear door.

